

## Solid State Broadband High Power Amplifier

**2081 - BBS1C3KKO**
**1 – 500 MHz / 100 Watts**

The BBS1C3KKO (2081) is suitable for ultra broadband high power applications. This amplifier utilizes Push-Pull MOSFET power devices that provide wide frequency response and dynamic range, high gain, low distortions, and good linearity. Employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components achieve exceptional performance, and high efficiency. The system includes a universal voltage, single phase, power supply and a built-in forced air-cooling system. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



SKU#: 2081DERAAXXX

- Solid-state class AB design
- Instantaneous ultra broadband
- Small and lightweight
- Standard front panel manual gain adjust
- Suitable for CW, AM, and FM (Consult factory for other modulation types)
- 50 Ohm Input/Output impedance
- High reliability and ruggedness

### ELECTRICAL SPECIFICATIONS @ 120V<sub>AC</sub>, 25°C, 50Ω system

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	1		500	MHz
Output Power CW	P <sub>SAT</sub>	100			Watt
Output Power @ 1dB Gain Compression	P <sub>1dB</sub>	50			Watt
Power Gain @ 1dB Gain Compression	G <sub>1dB</sub>	50			dB
Input Power for Rated P <sub>SAT</sub>	P <sub>IN</sub>		0	3	dBm
Small Signal Gain Flatness, P <sub>IN</sub> = -20dBm	ΔG		±1.5	±2.0	dB
Gain Adjustment Range	FGA	20	25		dB
Input Return Loss	S <sub>11</sub>			-10	dB
Noise Figure @ maximum gain	NF		10		dB
Third Order Intercept Point 2-Tone @ 40dBm/Tone, 100kHz Spacing	IP3		+57		dBm
Harmonics @ P <sub>OUT</sub> = 50W	H		-20		dBc
Spurious Signals	Spur		-70	-60	dBc
Operating Voltage (1-phase)	V <sub>AC</sub>	100		240	Volt
Power Consumption @ 100W CW	P <sub>D</sub>			850	Watt

### MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimension (W x H x L)	19 x 5.25 x 22	Inch
Weight	47	Pound
RF Connectors Input/Output	Type-N, Female	
Cooling	Built-in forced air cooling system	

### ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T <sub>A</sub>	0		+50	°C
Non-operating Temperature	T <sub>STG</sub>	-40		+85	°C
Relative Humidity (non-condensing)	RH	95			%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock MIL-STD-810F - Method 514.5/516.5 – Proc I	SH / VI		Airborne		

## Solid State Broadband High Power Amplifier

**2081 - BBS1C3KKO**
**1 – 500 MHz / 100 Watts**
**LIMITS**

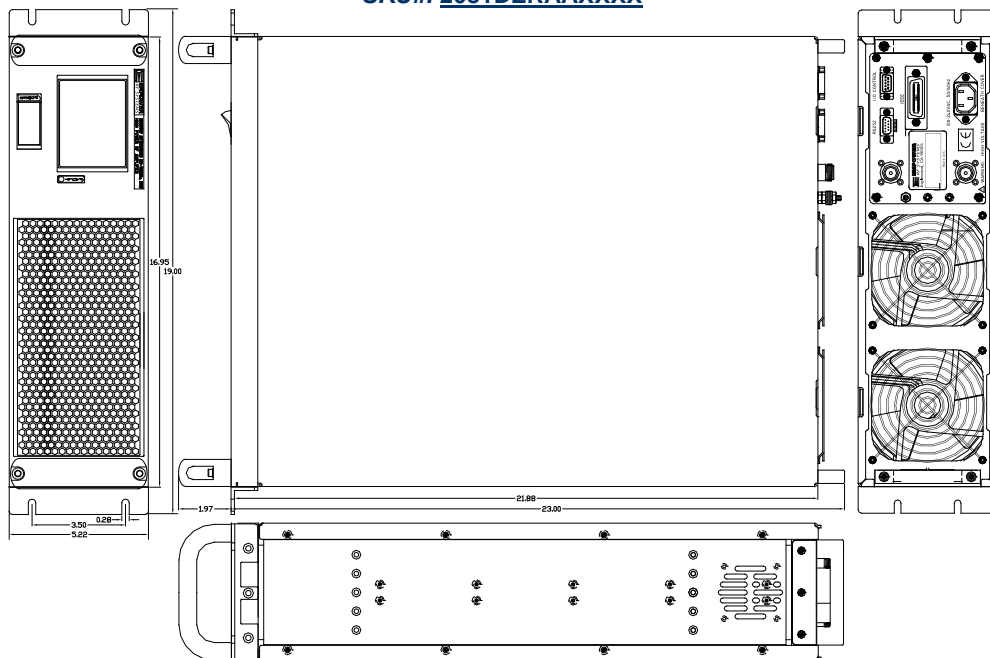
Input RF drive level without damage	+6dBm	Max
Load VSWR @ P <sub>OUT</sub> = 50W	∞ @ all load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	85°C shutdown	Max

**AVAILABLE OPTIONS**

SKU #	Description	LCD Touchscreen
2081DERAAXXX	LCD controller, Rear RF connectors and Ethernet. 100-240VAC, 50/60Hz.	Touchscreen Digital Display, including FWD/REV Power indication (dBm or Watt scale), Gain Adjustment, ALC Fast/Slow, On/Off, Standby mode, Fault indication, Rear panel GPIB/HPIB IEEE-488.2 and Half Duplex RS232. <i>Note: (Output power is lowered by 0.5-0.75dB with this option)</i>
2081DFFAAXXX	FGA (Front Gain Adjust) Front RF Connectors, 100-240VAC, 50/60Hz	
Optional	Rack Slides (Call for price)	

**I/O INTERFACE CONNECTOR – D-sub 9-Pin, Female**

Pin #	Description	Specification	Option	
			FGA	LCD
1	Forward TP	Analog Voltage 0-5V <sub>DC</sub> relative to Forward Power Level		√
2	Reverse TP	Analog Voltage 0-5V <sub>DC</sub> relative to Reverse Power Level		√
3	5V TP	Test point: 5.0V <sub>DC</sub> ±0.2V	√	√
4	VVA TP	Test point: 5.6V <sub>DC</sub> ±0.2V	√	
5	EXT Shutdown	Amplifier Disable: TTL Logic High (5V) (Internally Pulled-Low)	√	√
6	12V TP	Test point: 12.0V <sub>DC</sub> ±0.5V	√	√
7	P/S TP	Test point: 26.0-30.0V <sub>DC</sub>	√	√
8&9	GND	Ground	√	√

**OUTLINE DRAWING SHOWN**
**SKU#: 2081DERAAXXX**


# Solid State Broadband High Power Amplifier

2081 - BBS1C3KKO

1 – 500 MHz / 100 Watts

## TYPICAL PERFORMANCE PLOTS

### Plot 1 – Small Signal Gain and $P_{1dB}$

Top Curve: Small Signal Gain @  $P_{IN} = -20dBm$   
 Middle Curve: Power Gain @  $P_{1dB}$ ,  $P_{IN} = -4.0dBm$   
 Reference: 51dB, 1dB/div.  
 Bottom Curve: Input Return Loss  
 Reference: 0dB, 10dB/div.



### Plot 2 – Small Signal Gain and $P_{SAT}$

Top Curve: Small Signal Gain @  $P_{IN} = -20dBm$   
 Middle Curve: Power Gain @  $P_{SAT}$ ,  $P_{IN} = 1.0dBm$   
 Reference: 51dB, 1dB/div.  
 Bottom Curve: Input Return Loss  
 Reference: 0dB, 10dB/div.



### Plot 3 – Gain Adjustment Range

Top Curve: Maximum Gain @  $P_{IN} = -20dBm$   
 Middle Curve: Minimum Gain @  $P_{IN} = -20dBm$   
 Reference: 30dB, 10dB/div.  
 Bottom Curve: Input Return Loss @ Minimum Gain  
 Reference: 0dB, 10dB/div.

