

Solid State Broadband High Power Amplifier

2135 – BBS3G6QHM
300 – 3800 MHz / 50 Watts

The BBS3G6QHM (2135) is suitable for ultra broadband high power linear applications, laboratory, and RFI/EMC susceptibility testing. This dual band amplifier utilizes MOSFET/LDMOS Amp for low-band and GaAsFET Amps for high-band frequency. Employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components achieve exceptional performance, and high efficiency. The system includes a universal voltage, single phase, power supply and a built-in forced air-cooling system. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



SKU#: 2135DLFAAXLXX

- Solid-state class AB and class A design
- Instantaneous ultra broadband
- Small form factor and lightweight
- Suitable for CW, AM and FM (Consult factory for other modulation types)
- 50 ohm input/output impedance
- High reliability and ruggedness
- Built-in control, monitoring and protection circuits

ELECTRICAL SPECIFICATIONS @ 120V_{AC}, 25°C, 50 Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency (Dual Band)	BW - Low	300		1000	MHz
	BW - High	800		3800	
Output Power CW	P _{SAT} - Low	72	80		Watt
	P _{SAT} - High	45	50		
Output Power @ 1dB Gain Compression	P _{1dB} - Low	50			Watt
	P _{1dB} - High		50		
Power Gain @ 1dB Gain Compression	G _{1dB}	46	48		dB
Input Power for Rated P _{SAT}	P _{IN}		0	3	dBm
Gain Flatness	ΔG			±2.0	dB
Gain Adjustment Range	FGA	25			dB
Input Return loss	S ₁₁			-10	dB
Noise Figure	NF		10		dB
Third Order Intercept Point 2-Tone @ 42dBm/Tone, 100kHz Spacing	IP3		+56		dBm
Harmonics @ P _{OUT} = 50W	2 ND - Low		-40		dBc
	2 ND - High		-20		
	3 RD		-20		
Spurious Signals	Spur			-73	dBc
Operating Voltage (1-phase)	V _{AC}	100		240	Volt
Power Consumption @ P _{OUT} = 50W	P _D		600		Watt

MECHANICAL SPECIFICATIONS

Parameter	Value	Units
Dimensions	19 x 5.25 x 22	Inch
Weight	57	lb.
RF Connectors Input/Output	Type-N, Female	
Cooling	Internal forced-air cooling system	

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T _A	0		+50	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock MIL-STD-810F – Method 514.5/516.5 – Proc I	VI/SH		Airborne		

Solid State Broadband High Power Amplifier

2135 – BBS3G6QHM
300 – 3800 MHz / 50 Watts
LIMITS


Input RF drive level without damage	+6 dBm	Max
Load VSWR @ P _{OUT} = 50W	∞ @ all load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	85°C shutdown	Max

AVAILABLE OPTIONS

SKU #	Description	LCD Touchscreen
2135DEFAAXLXX	LCD controller, Ethernet, Front RF connectors 100-240VAC, 50/60Hz	Touchscreen Digital Display, including FWD/REV Power indication (dBm or Watt scale), Gain Adjustment, ALC Fast/Slow, On/Off, Standby mode, Fault indication, Rear panel GPIB/HPIB IEEE-488.2 and Half Duplex RS232.
2135DERAAXLXX	LCD controller, Ethernet, Rear RF connectors 100-240VAC, 50/60Hz	
2135DLFAAXLXX	LCD controller, Front RF connectors 100-240VAC, 50/60Hz	
Optional	Rack Slides (Call for price)	

I/O INTERFACE CONNECTOR – D-Sub 9-Pin, Female

Pin #	Description	Specifications
1	FWD Test Point	Analog Voltage 0-5V _{DC} relative to Forward Power Level
2	REV Test Point	Analog Voltage 0-5V _{DC} relative to Reverse Power Level
3	5V Test Point	+5.0V _{DC} ±0.2V
4	VVA Test Point	+5.6V _{DC} ±0.2V
5	EXT Shutdown	Disable: TTL Logic High (5V) (Internally Pulled-Low)
6	12V Test Point	+12.0V _{DC} ±0.5V
7	P/S1 Test Point	+12.0-15.0V _{DC}
8	P/S2 Test Point	+26.0-30.0V _{DC}
9	GND	Ground

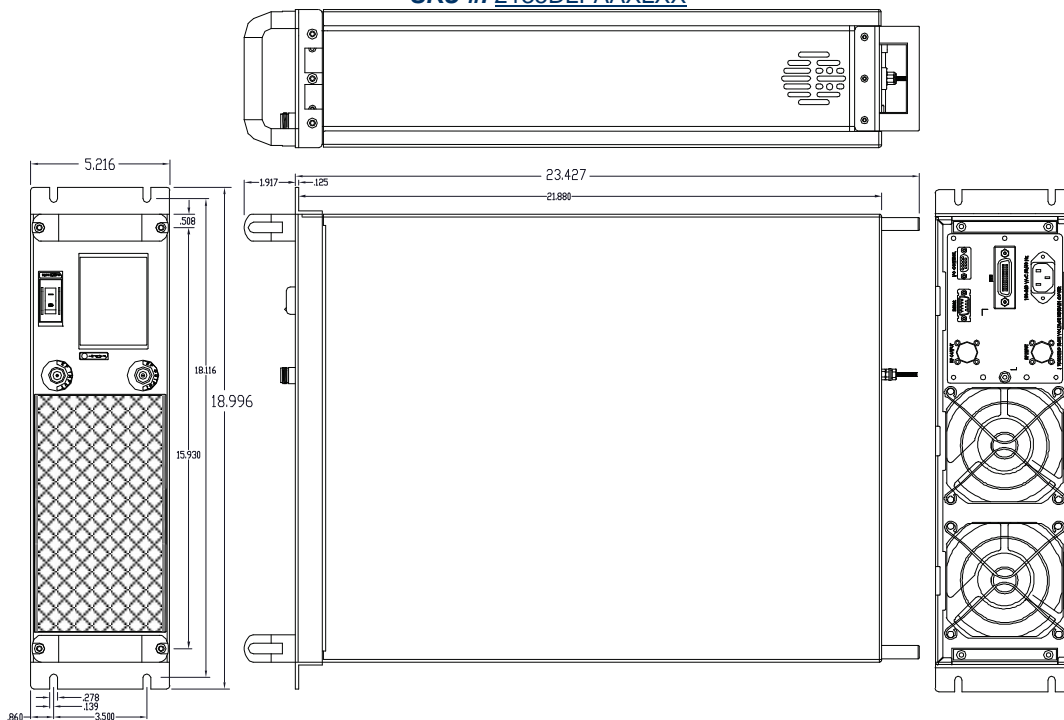SYSTEM OUTLINE SHOWN
SKU #: [2135DLFAAXLXX](#)


Solid State Broadband High Power Amplifier


2135 – BBS3G6QHM

300 – 3800 MHz / 50 Watts

TYPICAL PERFORMANCE PLOTS – LOW BAND


Plot 1 – Small Signal Gain and P_{1dB}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = -4.5dBm$
 Reference: 51dB, 1dB/Div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/Div.

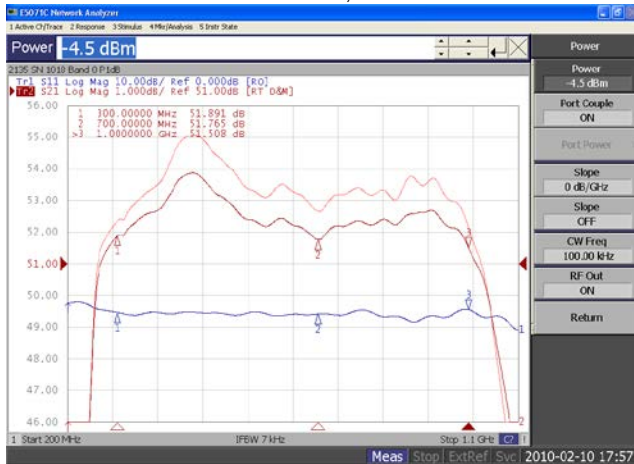

Plot 2 – Small Signal Gain and P_{SAT}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = -0.5dBm$
 Reference: 50dB, 1dB/Div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/Div.

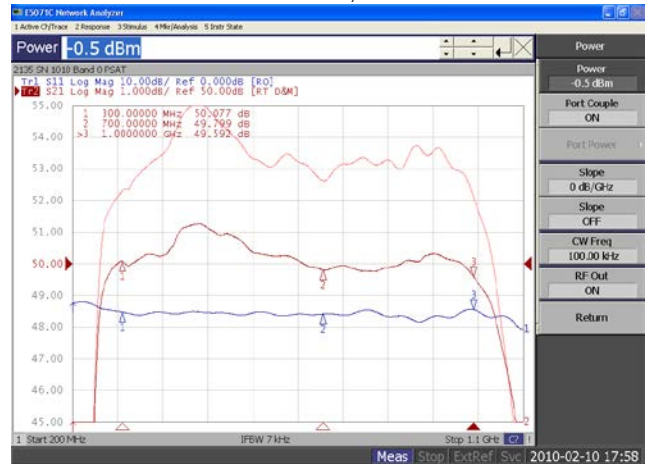

Plot 3 – Gain Adjustment Range

Top Curve: Maximum Gain @ $P_{IN} = -20dBm$
 Middle Curve: Minimum Gain @ $P_{IN} = -20dBm$
 Reference: 20dB, 10dB/Div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB, 10dB/Div.



Plot 4 – ALC Flatness

Top Curve: ALC @ 25W, $P_{IN} = 0dBm$
 Bottom Curve: ALC @ 5W, $P_{IN} = 0dBm$
 Middle Curve: Input Return Loss
 Reference: 41dB, 1dB/Div.
 Reference: 0dB, 10dB/Div.

