

Solid State Broadband High Power Amplifier

2191
20 – 1000 MHz / 100 Watts

The 2191 is suitable for multi-octave bandwidth high power CW, modulated, and pulse applications. This amplifier utilizes high power LDMOS devices that provide wide frequency response, high gain, high peak power capability, and low distortions. Exceptional performance, long-term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components. The amplifier is constructed within one single 3RU drawer including the forced air-cooling. Available operating voltage configurations are single-phase 100-240 VAC up to 400 Hz and 28 VDC.



SKU#: 2191-001

The amplifier includes a built in control and monitoring system, with protection functions which preserve high availability. Remote management and diagnostics are via an embedded web server allowing network managed site status and control simply by connecting the unit's Ethernet port to a LAN. Using a web browser and the unit's IP address (IPV4) allows ease of access with the benefit of multi-level security. The control system core runs an embedded OS (Linux), has a built-in non-volatile memory for event recording, and factory setup recovery features. The extended memory option allows storage of control parameters and event logs.

Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.

- Solid-state linear design
- Suitable for CW, AM, FM and pulse (Consult factory for other modulation types)
- Compact Modular design
- 50 ohm input/output impedance
- Built-in Control, Monitoring and Protection functions
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS 120V_{AC}, @ 25°C, 50 Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	20		1000	MHz
Power Output CW <i>(Note 1)</i>	P _{SAT}	80	100		Watt
Power Output @ 1dB Gain Compression <i>(Note 2)</i>	P _{1dB}	60	80		Watt
Power Gain @ 1dB Gain Compression	G _{1dB}	49			dB
Input Power Range	P _{IN}	-3.0	0	+3.0	dBm
Small Signal Gain Flatness / Leveled (ALC)	ΔG			±3.5/±1.0	dB
Gain Adjustment Range	VVA	20			dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure @ maximum gain 20-300MHz/300-1000MHz	NF			20/15	dB
Third Order Intermodulation Distortion 2-Tone @ 44dBm/Tone, 1MHz Spacing	IM3		-20		dBc
Harmonics @ P _{OUT} = 80W	2 ND			-20	dBc
	3 RD			-14	dBc
Spurious Signals	Spur			-60	dBc
Operating Voltage	V _{AC}	100		240	Volt
	V _{DC}	24	28	32	
Power Consumption @ 80W CW	P _D			750	VA

Notes:

1. CW measurement performed in MGC Mode (Manual Gain Control).
2. P1dB measurement performed with CCDF Method, IS-95, 1MHz BW.

MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimensions W x H x D (excludes connectors, handles and brackets)	17 x 5.25 x 22	Inch
Weight	65	Pound
RF Connectors Input/Output	Type-N, Female	-
RF Sample Connectors	Type-SMA, Female	-
Blanking Input Connector	Type-BNC, Female	-
Cooling	Built-in forced air cooling system	-

Solid State Broadband High Power Amplifier

2191
20 – 1000 MHz / 100 Watts
ENVIRONMENTAL CHARACTERISTICS (Design to meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T _A	-10		+50	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Shock / Vibration - MIL-STD-810F Shock Method 516.5, Vibration Method 514.5	SH / VI				

PROTECTIONS

Parameter	Specification	Unit
Input Overdrive	+10 dBm	Max
VSWR Protection	At ~3:1 Load – PA backs-off output power to a safe operating level – no system shutdown, “On Air” time is maximized	-
Thermal Shutdown	Above 50°C ambient	-
Default Data Recovery	Factory Default Calibration Recovery	-

COMMUNICATION INTERFACES

Function	Utility	Connector
Ethernet	Network Management of Device / Web Interface	RJ45
USB	Mass Storage / Expansion Bus	USB 1.x/2.0 compatible

SYSTEM I/O INTERFACE CONNECTOR – 14-Position


Pin #	Description	Specification
1	N/C	No Connection (reserved)
2	N/C	No Connection (reserved)
3	Summary Fault	Summary Fault: Active TTL Logic Low ($\leq 0.7V$) = Fault, (<i>Internally Pulled-High</i>)
4	N/C	No Connection (reserved)
5	Shutdown	Amplifier Disable: TTL Logic Low ($\leq 0.7V$), (<i>Internally Pulled-High</i>)
6	Aux P/S Test Point	+12.0V _{DC} $\pm 2.0V$ (resettable 0.5amp fuse)
7	Main P/S Test Point	+44.0V _{DC} $\pm 4.8V$ (resettable 0.5amp fuse)
8	GND	Ground
9-11	Open drain control	Site management utility (reserved)
12&13	Digital I/O (configurable)	Site management utility (reserved)
14	GND	Ground

Available Options

2191-xxx
-001 100-240VAC, 1-phase, 47-63 Hz, Rear RF Connectors
-002 28VDC, Rear RF Connectors
-003 100-240VAC, 1-phase, 47-63 Hz, Front RF Connectors
-004 28VDC, Front RF Connectors

Standard Features:

- LCD Control, Ethernet & Serial Comm
- Main RF Connectors: **Input & Output** [Type-N, F]
- Sample Ports: SMA-F [Forward & Reverse]
- Blanking/Gating Port: BNC-F
- Rack Slides, Handles and Rackmount Brackets

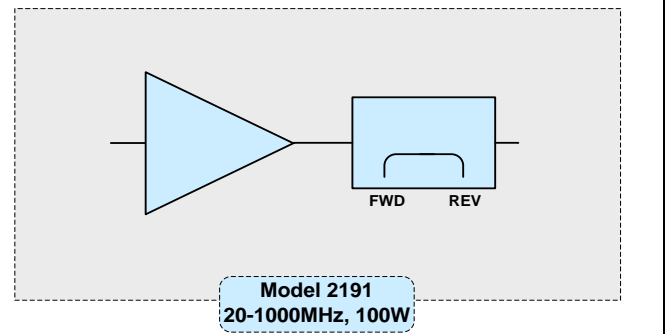
NOTIONAL BLOCK DIAGRAM


Solid State Broadband High Power Amplifier

2191

20 – 1000 MHz / 100 Watts

OUTLINE DRAWING – (shown with Rear RF Connectors)

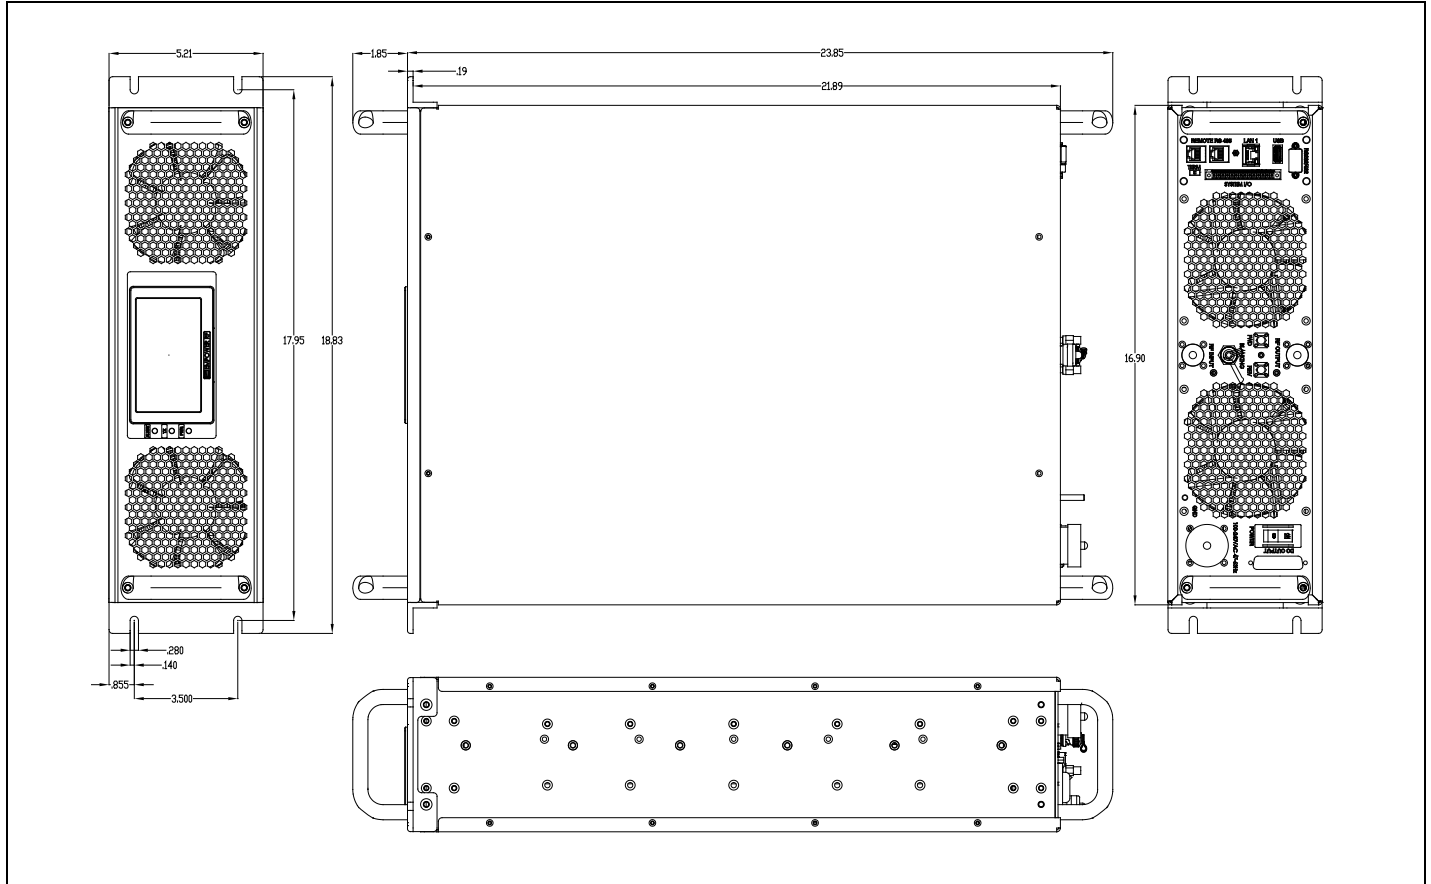

Front and Rear Views

