

Solid State High Power Amplifier

2229
2900 – 3500 MHz / 2.5 kW_{PK} Pulsed

The 2229 is a single drawer unit equipped with harmonic suppression filter produces a minimum output power of 2.5 kW peak pulsed or 500W CW in the S-band frequency. The amplifier features multiple high power GaN on SiC devices that provide wide frequency response, high gain, high peak power capability, and low distortions. Exceptional performance, long-term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components. The amplifier includes integral forced air-cooling fans. Available operating voltage configurations are single-phase, three- phase AC up to 400 hertz and 28 volts DC



The amplifier includes a built-in control and monitoring system, with protection functions which preserve maximum output capability and reliability. Remote management and diagnostics are via an embedded web server allowing network managed site status and control simply by connecting the unit's Ethernet port to a LAN. Using a web browser and the unit's IP address (IPV4) allows ease of access with the benefit of multilevel security. The control system core supports hardware encryption, runs an embedded OS (Linux), has a built-in non-volatile memory for event recording, and factory setup recovery features. The extended memory option allows storage of control parameters and event logs.

We are delivering more than just RF power, the next generation family of systems provide dynamic adjustments linked to the processing power and digital controls, which focus on maximizing system availability time as well as power output under ALL conditions.

Empower RF's ISO9001:2015 Quality Assurance Program assures consistent performance and the highest reliability.

- Solid-state class AB design
- Suitable for instantaneous pulse operation over the operating band.
- Compact Modular design and scalable architecture
- 50 ohm input/output impedance
- Built-in Control, Monitoring and Protection functions
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS over temperature conditions (0 to +50°C)

Parameter	Symbol	Min	Typical	Max	Unit
Operating Frequency	BW	2900		3500	MHz
Power Output – Peak Pulse	P _{SAT_PK}	2500			Watt
Power Output – CW	P _{SAT_CW}	500			Watt
Pulse Width @ Duty Cycle 20%(NOTE)	P _{WIDTH}	1		500	µSec
Duty Cycle		0.5		20	%
Pulse Repetition Rate Frequency	PRF	0.5		25	kHz
Power Gain @ Rated Peak P _{OUT} - Pulse	G _{PK}	65			dB
Pulse Droop @ 500µSec Pulse Width	P _{DROOP}		1.2	1.5	dB
Modulated Pulse Rise/Fall Time (10% to 90%)	T _{RISE/T_FALL}		70/70	150/150	nSec
Input power for rated Output – Pulse & CW signal	P _{IN}		-5	0	dBm
Input Return Loss	S ₁₁			-10	dB
NPO – Noise Power Output	Enabled			-10	dBm/MHz
	Disabled			-106	
Harmonics @ P _{OUT_PULSE} = 2.5kW _{PK}	2 ND -5 TH			-60	dBc
Spurious Signals	Spur		-60	-55	dBc
Operating Voltage	3-phase (Line-to-Line)		180	208	Volt
	1-Phase		100	260	
Power Consumption @ 20% _{DC} , P _{OUT_PULSE} = 2.5W _{PK}	P _D		1350	1750	VA

NOTE: Call factory for application >20% duty cycle.

PROTECTIONS

Parameter	Specification
Input Overdrive	≥10 dBm – Shutdown
Load VSWR Protection	The unit disables the RF when reverse power exceeds the safe level @ all load phase & amplitude
Thermal Shutdown	Baseplate ≥90 °C
Default Data Recovery	Factory Default Calibration Recovery

Solid State High Power Amplifier

2229
2900 – 3500 MHz / 2.5 kW_{PK} Pulsed

MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Overall Dimension (W x H x D) (excludes handles, connectors and brackets)	17 x 8.75 x 22	Inch
Total Weight	95	Pound
RF Connectors Input/Output	Input: N-Type, Female Output: 7/16-DIN, Female	RF IN RF OUT
RF Sample Connectors	Type-SMA, Female	Forward / Reverse
Blanking/Gating Input Connector	BNC Female	Blanking
Cooling	Built-in forced-air cooling system – front to rear	Airflow Direction

ENVIRONMENTAL CHARACTERISTICS:

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature <i>NOTE 1</i>	T _C	-10		+50	°C
Non-operating Temperature	T _{STG}	-35		+75	°C
Relative humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F)	ALT			10,000	Feet
Shock / Vibration (MIL-STD-810F, Shock Method 516.5, Vibration Method 514.5)	SH / VI				-

Note: 1. Call factory for extended operating temperature range.

COMMUNICATION INTERFACES:

Function	Utility	Connector
Ethernet	Network management of device / web interface	RJ45

SYSTEM I/O CONNECTOR – 14-Position

Pin #	Description	Specification
1	FWD Test Point	Forward detected power (analog voltage: 0-5 Volt)
2	REV Test Point	Reverse detected power (analog voltage: 0-5 Volt)
3	Summary Fault	Summary Fault: Active TTL Logic Low ($\leq 0.7V$) (Internally Pulled-High)
4	N/C	No Connection (reserved)
5	Shutdown	Amplifier Disable: TTL Logic Low ($\leq 0.7V$) (Internally Pulled-High)
6	Aux P/S Test Point	+12.0V _{DC} $\pm 2.0V$ (resettable 0.5amp fuse)
7	Main P/S Test Point	+44.0V _{DC} $\pm 4.8V$ (resettable 0.5amp fuse)
8	GND	Ground
9-11	Open drain control	Site management utility (reserved)
12&13	Digital I/O (configurable)	Site management utility (reserved)
14	GND	Ground

Available Options


2229-00X
-001 180-260 VAC, 3-phase-Delta, 47-63 Hz, Rear RF Connectors
-002 TBD

Contact us for other available options; sales@empowerrf.com

Standard Feature:

- LCD Control, Ethernet & Serial Comm
- Sample Port: SMA-F [Forward & Reverse]
- Blanking/Gating Port: BNC-F
- Rack Slides, Handles and Rackmount Brackets


NOTIONAL BLOCK DIAGRAM

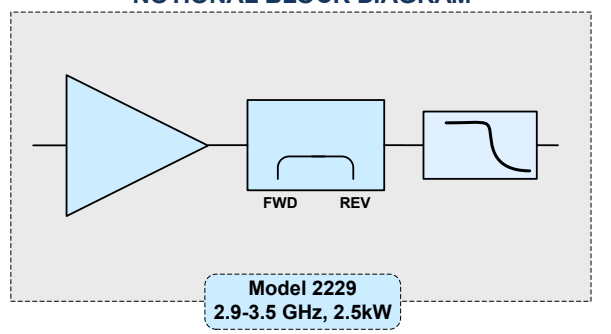

Solid State High Power Amplifier


2229
2900 – 3500 MHz / 2.5 kW_{PK} Pulsed

MECHANICAL OUTLINE

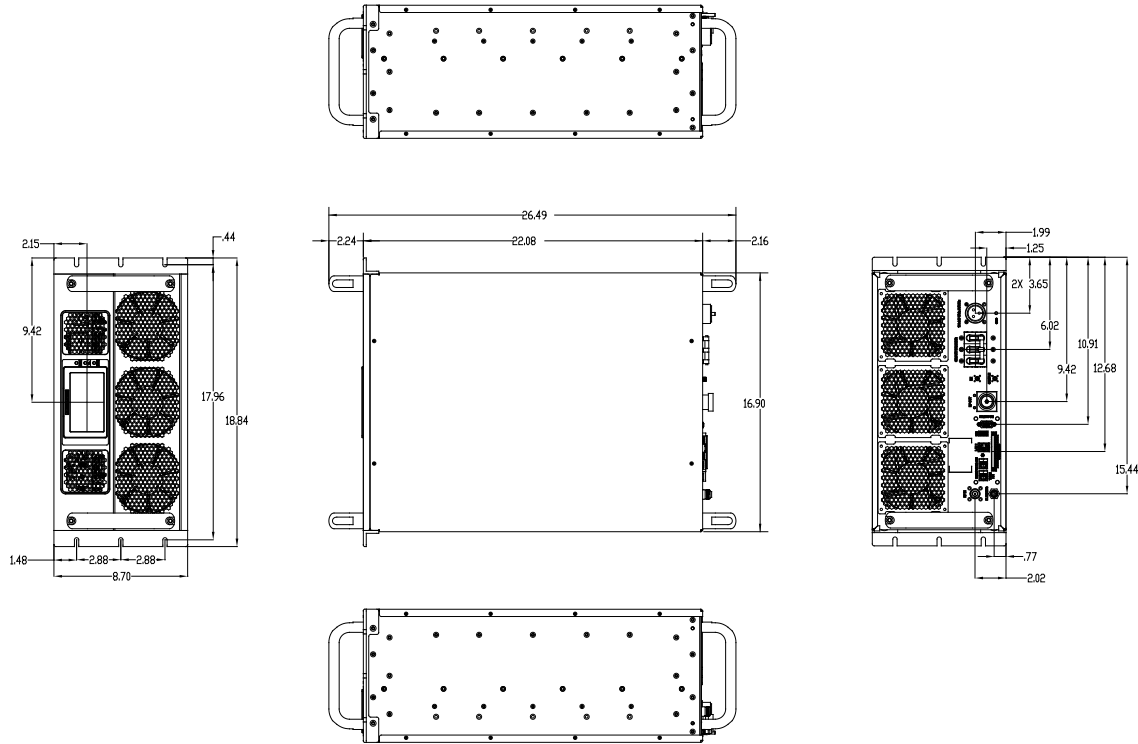


TYPICAL PERFORMANCE

Small Signal Gain & Input Return Loss @ P_{IN} = -30dBm

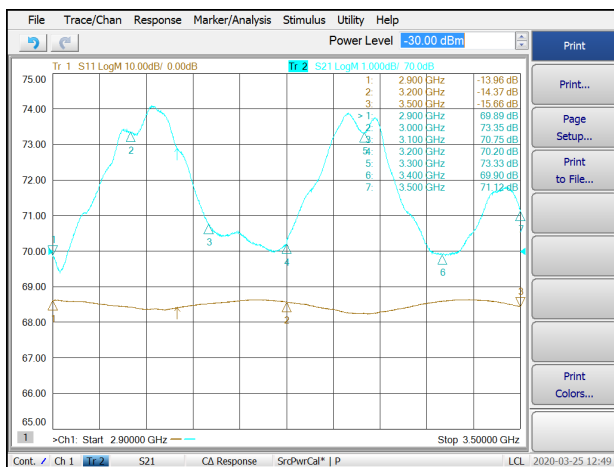

Pulse Performance Characteristics

 Pulse Width: 500 μ Sec
 Duty Cycle: 20%

 Pulse Width: 2 μ Sec
 Duty Cycle: 0.5%
